

SYLVANIA Lamps

TruWave® Technology A19

TruWave® Technology

TruWave Technology offers the best alternative to natural light by mimicking the natural light spectrum, all while saving energy.

Benefits and Features

- Controls blue wavelengths for lower glare and reduced eye strain to improve readability and supports an improved sleep-wake cycle
- Perfect fit where clean light color rendering is needed for seeing realistic, vivid colors without sacrificing light output
- Properly saturates red to make building spaces and flesh tones accurate and vibrant, without oversaturating (which compromises energy efficiency)
- Exceptional color quality without the loss of efficacy typical of most 90+ CRI solutions
- Up to 123 LPW
- 2700K, 3000K, 3500K, 4000K and 5000K color temperatures
- Approved for enclosed fixtures

Electrical

- 120VAC
- Power factor >0.90
- Dimmable down to 10%

Rated Life

- 15,000 hours (L₇₀)

Warranty

- 5 year limited lamp warranty (3 hours per day operation)
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)



TruWave®

Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
Incandescent	40	5.5	\$57
Incandescent	60	8	\$86
Incandescent	75	11	\$106
Incandescent	100	15	\$140

Certifications and Listings

- cULus
- cETLus
- RoHS
- Lead Free
- FCC*
- California Title 20

*FCC Title 47 CFR, Part 15 Subpart B Class B



Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

LED	XX	AXX	DIM	XX	9	XX	13Y	TL	RPX
LED	Wattage 5 = 5 Watts 5.5 = 5.5 Watts 8 = 8 Watts 11 = 11 Watts 15 = 15 Watts	Lamp Type A19	DIM = Dimmable	Bulb Finish CL = Clear O = Omnidirectional	CRI 9 = 90+	Color Temperature 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	Lamp Life 13Y = 13 Year Life	TL = TruWave® Technology	RP = 1PK Retail RP2 = 2PK Retail RP4 = 4PK Retail RP6 = 6PK Retail

Ordering Information

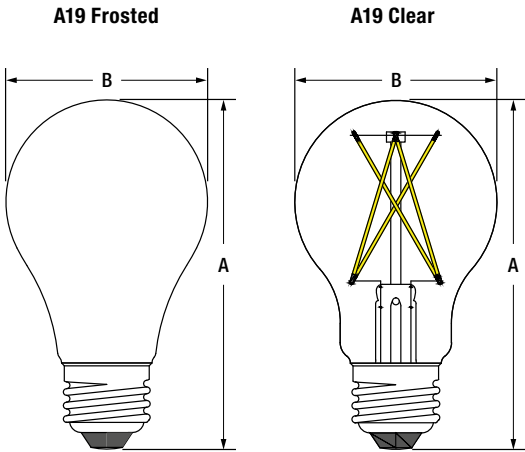
Item Number	Ordering Abbreviation	Finish	Power (W)	Base Type	Input Voltage	Average Life (hrs)	Typical Lumens (lm)	CCT	CRI	LPW	Replaces (W)
42098	LED5A19DIMCL93513YTLRP4 16/CS 4/SKU	Clear	5	E26	120V	15,000	450	3500K	90+	90	40W
40686	LED5.5A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	5.5	E26	120V	15,000	450	2700K	90+	82	40W
40699	LED5.5A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	5.5	E26	120V	15,000	450	2700K	90+	82	40W
49826	LED5.5A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	5.5	E26	120V	15,000	450	5000K	90+	82	40W
40700	LED8A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	8	E26	120V	15,000	800	2700K	90+	100	60W
40687	LED8A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	8	E26	120V	15,000	800	2700K	90+	100	60W
42099	LED8A19DIMCL93513YTLRP4 16/CS 4/SKU	Clear	8	E26	120V	15,000	800	3500K	90+	100	60W
49827	LED8A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	8	E26	120V	15,000	800	5000K	90+	100	60W
40701	LED11A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	11	E26	120V	15,000	1100	2700K	90+	100	75W
40688	LED11A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	11	E26	120V	15,000	1100	2700K	90+	100	75W
42100	LED11A19DIMCL93513YTLRP4 16/CS 4/SKU	Clear	11	E26	120V	15,000	1100	3500K	90+	100	75W
40803	LED11A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	11	E26	120V	15,000	1100	5000K	90+	100	75W
42275	LED15A19DIMCL092713YTLRP4 16/CS 4/SKU	Clear	15	E26	120	15,000	1600	2700K	90+	107	100W
42303	LED15A19DIMCL092713YTLRP 6/CS 1/SKU	Clear	15	E26	120	15,000	1600	2700K	90+	107	100W
42305	LED15A19DIMCL092713YTLRP2 6/CS 2/SKU	Clear	15	E26	120	15,000	1600	2700K	90+	107	100W
42273	LED15A19DIMCL095013YTLRP4 16/CS 4/SKU	Clear	15	E26	120	15,000	1600	5000K	90+	107	100W
42274	LED15A19DIMCL093513YTLRP4 16/CS 4/SKU	Clear	15	E26	120	15,000	1600	3500K	90+	107	100W
40724	LED5.5A19DIM092713YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	2700K	90+	82	40W
40668	LED5.5A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	2700K	90+	82	40W
41150	LED5.5A19DIM093013YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	3000K	90+	82	40W
41212	LED5.5A19DIM093513YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	3500K	90+	82	40W
41296	LED5.5A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	3500K	90+	82	40W
41143	LED5.5A19DIM094013YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	4000K	90+	82	40W
40725	LED5.5A19DIM095013YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	5000K	90+	82	40W
40669	LED5.5A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	5000K	90+	82	40W
40671	LED8A19DIM092713YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100	60W
40670	LED8A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100	60W
40748	LED8A19DIM092713YTLRP6 18/CS 6/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100	60W
40813	LED8A19DIM092713YTLRP6W0 6/CS 6/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100	60W
41151	LED8A19DIM093013YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	3000K	90+	100	60W
41211	LED8A19DIM093513YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	3500K	90+	100	60W
41295	LED8A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	3500K	90+	100	60W
41142	LED8A19DIM094013YTLRP 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	4000K	90+	100	60W
40673	LED8A19DIM095013YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100	60W
40672	LED8A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100	60W
49824	LED8A19DIM095013YTLRP6 18/CS 6/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100	60W
40726	LED11A19DIM092713YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100	75W
40662	LED11A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100	75W
40750	LED11A19DIM092713YTLRP2 8/CS 2/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100	75W
41152	LED11A19DIM093013YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	3000K	90+	100	75W
41213	LED11A19DIM093513YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	3500K	90+	100	75W
41297	LED11A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	3500K	90+	100	75W
41144	LED11A19DIM094013YTLRP 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	4000K	90+	100	75W
40727	LED11A19DIM095013YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	5000K	90+	100	75W
40663	LED11A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	5000K	90+	100	75W
40751	LED11A19DIM095013YTLRP2 8/CS 2/SKU	Frosted	11	E26	120V	15000	1100	5000K	90+	100	75W

Ordering Information (continued)

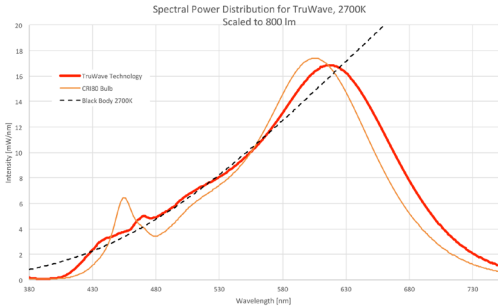
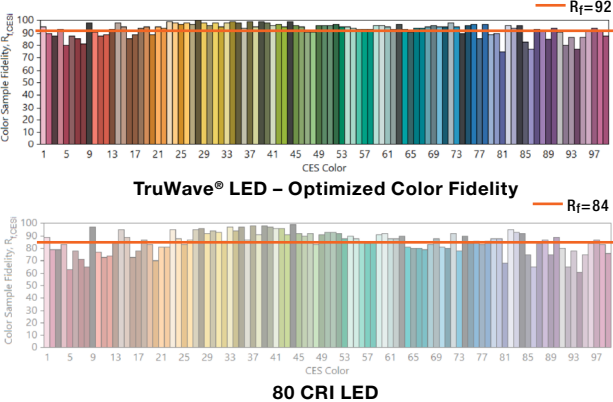
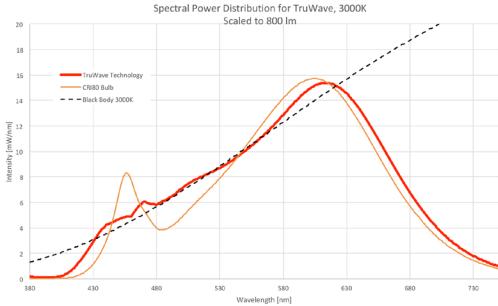
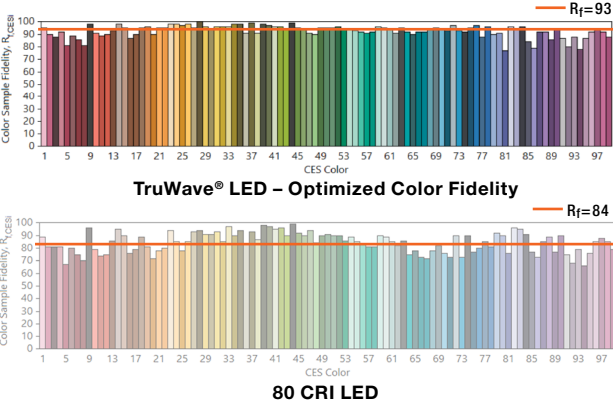
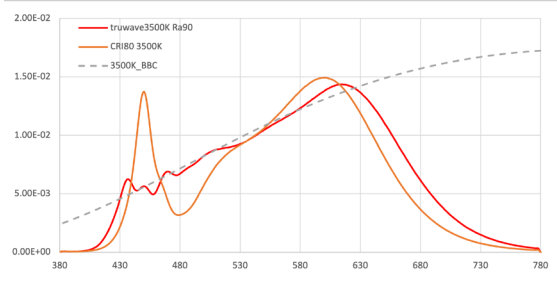
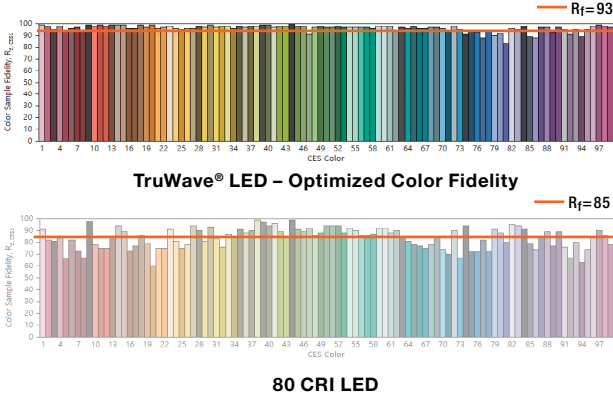
Item Number	Ordering Abbreviation	Finish	Power (W)	Base Type	Input Voltage	Average Life (hrs)	Typical Lumens (lm)	CCT	CRI	LPW	Replaces (W)
42278	LED15A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	15	E26	120	15,000	1600	2700K	90+	107	100W
42304	LED15A19DIM092713YTLRP 6/CS 1/SKU	Frosted	15	E26	120	15,000	1600	2700K	90+	107	100W
42276	LED15A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	15	E26	120	15,000	1600	5000K	90+	107	100W
42290	LED15A19DIM095013YTLRP 6/CS 1/SKU	Frosted	15	E26	120	15,000	1600	5000K	90+	107	100W
42306	LED15A19DIM092713YTLRP2 6/CS 2/SKU	Frosted	15	E26	120	15,000	1600	2700K	90+	107	100W
42292	LED15A19DIM095013YTLRP2 8/CS 2/SKU	Frosted	15	E26	120	15,000	1600	5000K	90+	107	100W
42296	LED15A19DIM094013YTLRP 6/CS 1/SKU	Frosted	15	E26	120	15,000	1600	4000K	90+	107	100W
42295	LED15A19DIM093013YTLRP 6/CS 1/SKU	Frosted	15	E26	120	15,000	1600	3000K	90+	107	100W
42294	LED15A19DIM093513YTLRP 6/CS 1/SKU	Frosted	15	E26	120	15,000	1600	3500K	90+	107	100W
42277	LED15A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	15	E26	120	15,000	1600	3500K	90+	107	100W
42291	LED15A19DIMCL095013YTLRP2 8/CS 2/SKU	Frosted	15	E26	120	15,000	1600	5000K	90+	107	100W

Physical Information

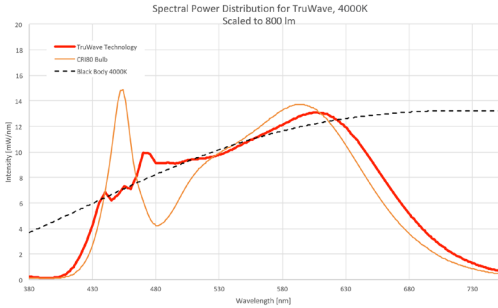
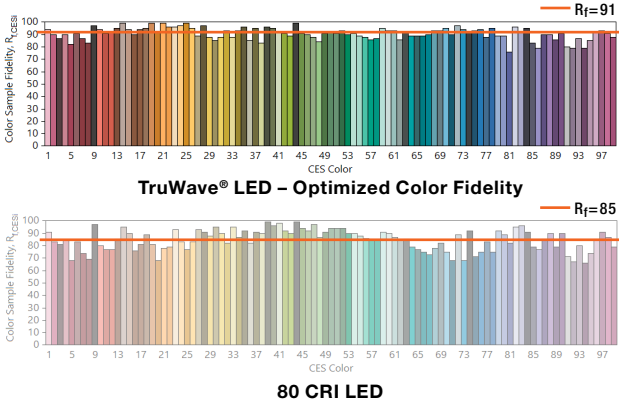
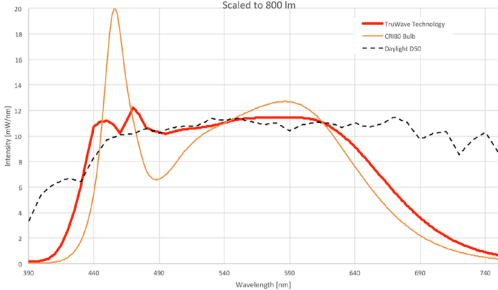
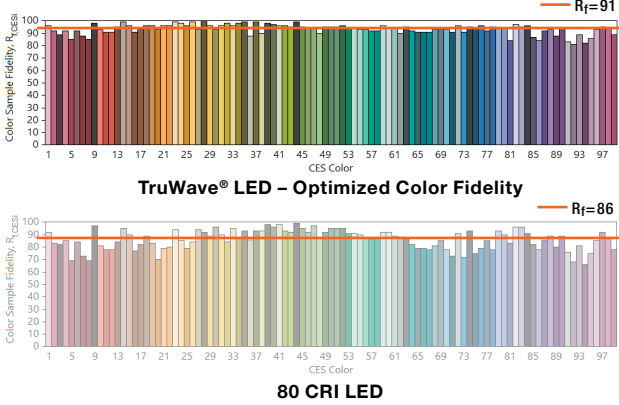
	(A) Height inches (mm)	(B) Diameter inches (mm)
A19	4.05 (103)	2.36 (60)



Color Quality Comparison

CCT	Spectral Power Distribution	TM-30-18 Fidelity Index
2700K		
3000K		
3500K		

Color Quality Comparison (continued)

CCT	Spectral Power Distribution	TM-30-18 Fidelity Index
4000K		
5000K		

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

