


Project Name:	Type:
Part Number:	Date:

CCT SELECT HYBRID PL


FEATURES

- Replaces 26W CFL lamps
- DIRectional or BYPass installation
- DIRectional installation* - Compatible with magnetic ballast (G24d/GX24d)
- BYPass installation - Work off line voltage (G24d/GX24d/G24q/GX24q)
- SelectKelvin technology - field selectable color temperature in 2700K, 3000K, 3500K, and 4000K
- Available in Horizontal & Vertical installation design
- 310° rotatable base allows light to be directed as needed and maximize performance in fixture (Horizontal installation models)
- Exceptional high efficacy up to 138 LPW
- Suitable for damp locations
- UL Listed and UL Classified
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Rated lifetime (L70): 50,000hrs
- 5 year limited warranty** / 10 year available
(see EXTENDED WARRANTIES table for information)

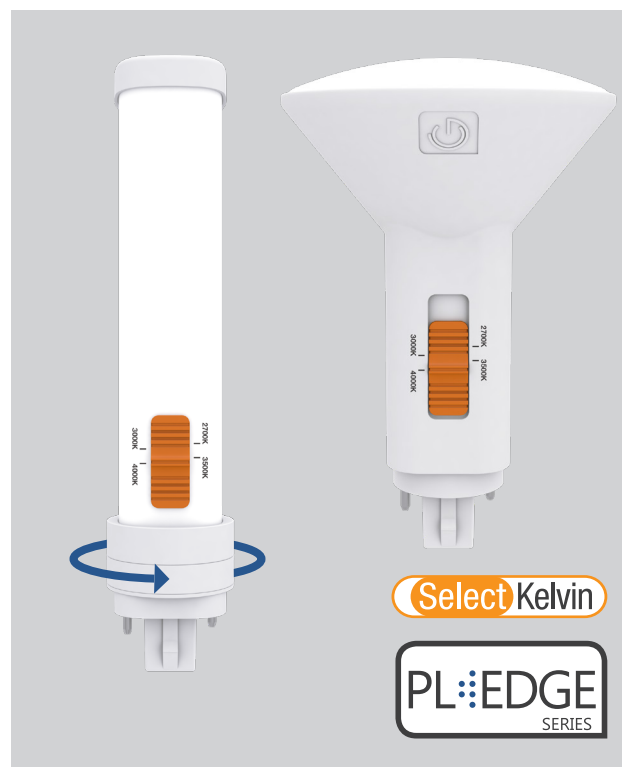

071624

FOCUS FEATURE

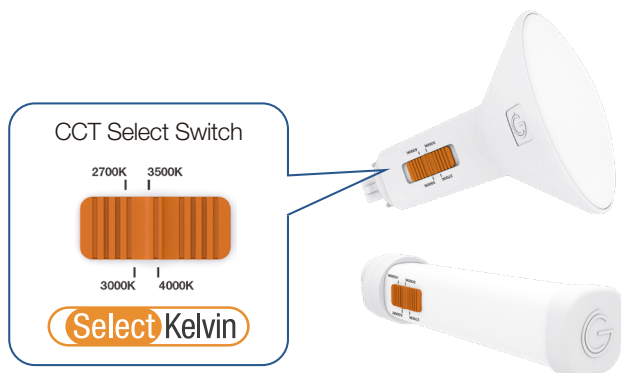

SPECIFICATIONS

Product	Model	Equiv.	Input Voltage	Wattage	CCT	Lumens	Efficacy (LPW)	CRI	Power Factor	THD	Beam Angle	Dim.	Fixture Rating	DOE
37084	8PLH/8CCTS/HYBM	26W	120-277V	8	2700K	870	109	82	0.9	<20%	110°	No	Non-Enclosed	✓
					3000K	920	115							
					3500K	1,000	125							
					4000K	1,000	125							
37085	8PLV/8CCTS/HYBM	26W	120-277V	8	2700K	1,000	125	82	0.9	<20%	120°	No	Non-Enclosed	✓
					3000K	1,050	131							
					3500K	1,100	138							
					4000K	1,100	138							


* Ballast Dependent. Please refer to www.greencreative.com for full ballast / dimmer compatibility list.

** Please visit www.greencreative.com for Limited Warranty terms.

Note: Factory setting at 4000K CCT.

CCT SELECT HYBRID PL

DIMENSION & WEIGHT

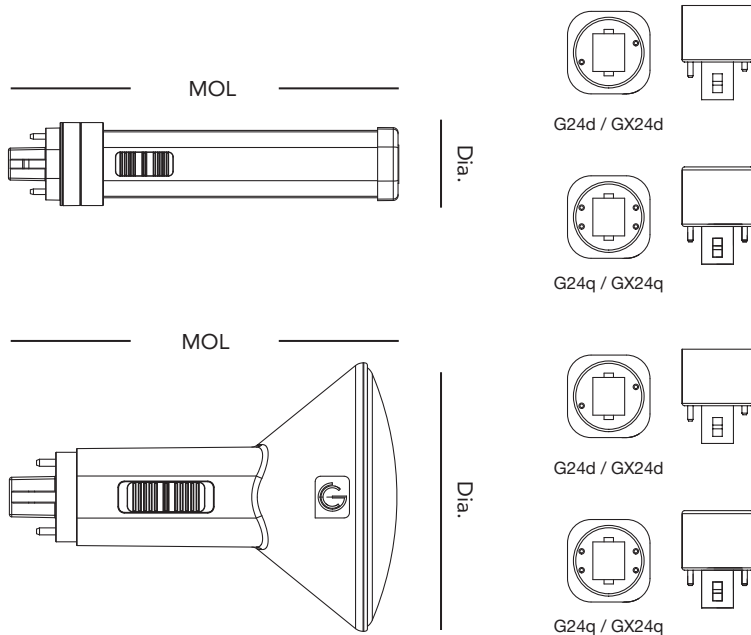



Model	8PLH/8CCTS/HYBM
Compatible base	G24d, GX24d, G24q & GX24q
MOL	6-3/8"
Dia.	1-3/8"
Weight	0.17 lb

Model	8PLV/8CCTS/HYBM
Compatible base	G24d, GX24d, G24q & GX24q
MOL	5-1/8"
Dia.	3-9/16"
Weight	0.24lb

MINIMUM COMPARTMENT DIMENSIONS

Note – the base of this lamp is 1-3/8" by 1-3/8" and the opening in the reflector should be a minimum of 1-3/8" by 1-3/8" to insure a proper fit. For non-enclosed rated applications the minimum compartment must follow the below guidelines.


<div>Non-enclosed Fixture Horizontal Installation</div> <div></div>	Model Number		8PLH/8CCTS/HYBM
	Lamp Compartment Dimensions	Diameter	6-1/8"
		Height	4-3/4"
	Maximum Lamps in Luminaire		2
	Lampholder-to-Lampholder Spacing		3/8"

<div>Non-enclosed Fixture Vertical Installation</div> <div></div>	Model Number		8PLV/8CCTS/HYBM
	Lamp Compartment Dimensions	Diameter	6-5/16"
		Height	9-1/16"
	Maximum Lamps in Luminaire		1

Product warranty is defined based on the condition of above minimum compartment size, maximum lamps in glass/metal luminaire.

CCT SELECT HYBRID PL

INSTALLATION




Adjust the CCT select switch to proper CCT position.

Note: Do not adjust the CCT select switch when power on.


DIRECT INSTALLATION – MAGNETIC BALLAST

When used with a magnetic ballast, the lamp can function as a plug & play lamp and operate with the existing ballast.

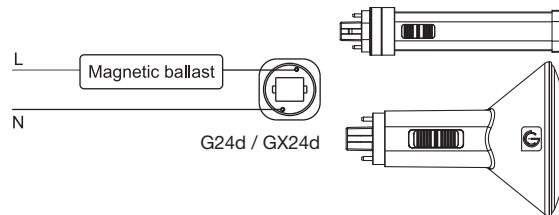





BYPASS INSTALLATION – NO BALLAST

If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

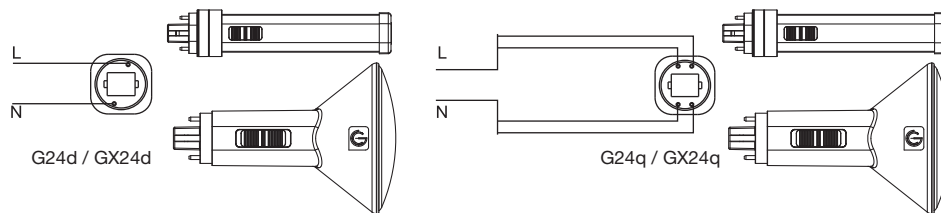

ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions	Compatible Skus
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)			8PLH/8CCTS/HYBM 8PLV/8CCTS/HYBM
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)			8PLH/8CCTS/HYBM 8PLV/8CCTS/HYBM



GREENCREATIVE

CCT SELECT HYBRID PL

ORDERING INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8PLH/8CCTS/HYBM	6PCS	6-3/4" x 4-5/8" x 3-1/4"	1.32 lb	24PCS	13-7/8" x 9-15/16" x 4-3/4"	5.95 lb
8PLV/8CCTS/HYBM	6PCS	11-1/4" x 7-1/2" x 5-1/2"	2.42 lb	24PCS	30-11/16" x 12-1/4" x 6-15/16"	11 lb

EXTENDED WARRANTIES****

Model	Description
8PLH/8CCTS/HYBM/10YEARWARRANTY	10 Year warranty for 8PLH/8CCTS/HYBM
8PLV/8CCTS/HYBM/10YEARWARRANTY	10 Year warranty for 8PLV/8CCTS/HYBM

**** Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum ambient temperature of 80°F / 27°C.

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice