

FEATURES

This LED series of exit sign is resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water. It takes advantage of a self-generated source of power in emergencies. The long-life LEDs in the fixture consume very low levels of energy – less than 2 Watts – and are rated for a life of up to 25 years.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Replaceable chevron directional indicator knockouts for control of direction.
- Compartment shaped by injection and has 1/2" knockouts for the supply of power.

FACE

- 6" high text with color diffusion
- Knockout directional chevrons

MOUNTING

- For side/wall mount or ceiling mount only, back mount on single face only

ELECTRICAL

- Universal 120V or 277V dual Input
- Only 2 Watts of power used
- LED light source
- Protected against short circuits and power surges

LISTED

- UL listed for 10°C - 40°C
- Wet location

AVAILABLE OPERATIONS:

- **AC Input** model offers a single circuit to be powered with main power source or back up source such as generator.


- **Two-circuit** input allows for a primary and auxiliary power source to be connected to the emergency unit that does not contain a battery. These two power sources cannot be live at the same time. Applications include those with inverters or alternate backup power sources

- **Emergency Battery Back-Up** provides a minimum of 90 minutes illumination when AC power is lost.
- Ni-cad battery
- Minimum 90 minutes of illumination
- Internal solid-state wiring for charging power
- Indicator light will reflect high charge and readiness for operation
- Test button
- Brown-out safeguard
- Disconnect for full discharge


- **Internal Heater** for cold temperature applications lets the fixture work at the temperatures down to -10°C / 15°F



FOR
WET
LOCATION

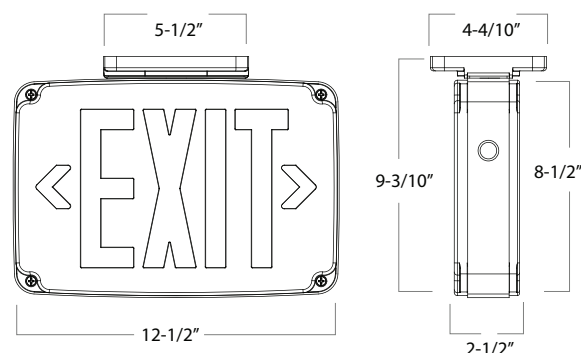

WALL MOUNTED

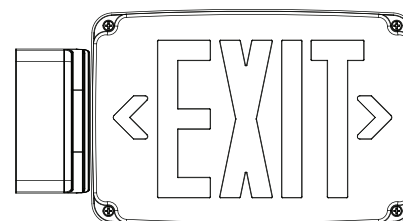

*Only one circuit shall be energized at a time.

CATALOG#	LETTER COLOR	NO. OF FACE	HOUSING COLOR	OPTION
ELX-LED-651	G - Green	1 - (1) FACE	W (WHITE)	2C (DUAL CIRCUIT)
WET LOCATION LED EXIT SIGN	R - Red	2 - (2) FACE	B (BLACK)	SDT (SELF DIAGNOSTIC TEST)
			GR (GRAY)	HTR (INTERNAL HEATER)
				EM (EMERGENCY)



SPECIFIED:

ELX-

CATALOG NO.

LETTER COLOR

NO. OF FACE

HOUSING COLOR

OPTION