




EMERGENCY / EXIT SIGN COMBO

With 2 LED Heads

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- 6 LEDs for letters and two LED heads
- Super bright selectable RED/GREEN LED lamps
- 3W power consumption, 180 lumens output, 6500K CCT
- 120/277VAC dual voltage operation

Certifications and Warranty

- FCC, CEC, DOE, ROHS Compliant
- 5-Year warranty for electrical parts and housing

Construction

- Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating
- Damp Location Rated
- Universal J-Box mounting
- **ESC-C-S-01** : Built-in 3.6V 1000mAh Ni-MH battery
- **ESC-C-S-02** : Built-in 3.6V 2000mAh Ni-MH battery
- 90 minutes emergency operation
- Maximum 24 hours for full recharge time

SKU Guide

Example: ESC-C-S-01-WH

Family	Face	Remote Capacity	Housing
ESC-C	-S = Selectable RED/GREEN Letters	-01 = No remote capacity -02 = With remote capacity	-WH = White


Specification

Model No.	Rated Voltage	Input Current	Input Watt	LED Type	Finish	Emergency Runtime
ESC-C-S-01-WH	120/277V	0.032-0.017A	2W	6 LEDs for letters and two LED heads	White	90 Mins
Remote Capable ESC-C-S-02-WH	120/277V	0.047-0.028A	2.8W	6 LEDs for letters and two LED heads	White	90 Mins

Contact for custom configuration & specifications

Dimensions

ESC-C-S-01/02

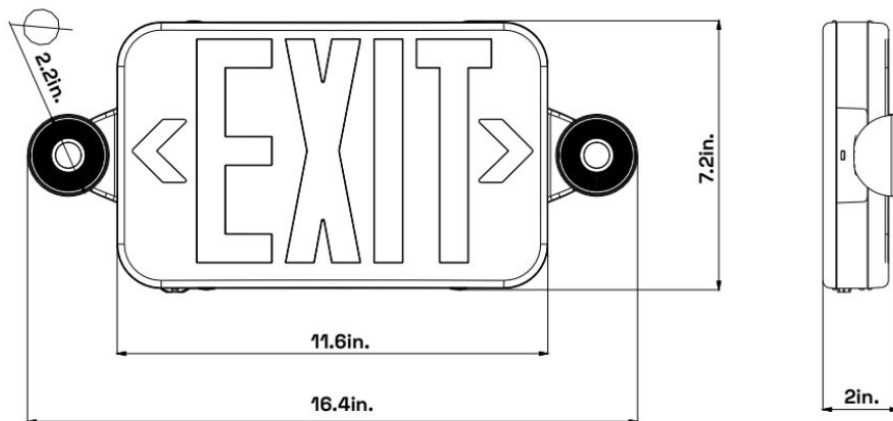

Packaging Dimensions

SKU#	Master Carton	Qty
ESC-C-S-01	17.7x16.1x9.0in	6
ESC-C-S-02	17.7x16.1x9.0in	6


WET LOCATION EMERGENCY/EXIT SIGN COMBO

With RED Exit Letter

Project: _____ Location: _____

Date: _____ Part #: _____

Notes: _____



Performance & Features

LED Source

- Letter 6" height with 3/4" stroke
- Super bright RED LED lamps
- 120/277VAC dual voltage operation

Certifications and Warranty

- FCC, CEC, DOE, ROHS Compliant
- 5-Year warranty for electrical parts and housing

Construction

- Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating
- Wet Location Rated
- Universal J-Box mounting
- Built-in 3.6V 1200mAh Ni-MH battery
- 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

SKU Guide

Example: ESC-S-W

Family

Face

Rated

ESC

S = Single Sided

W = Wet Location